

# Crack repair caulk

**INDOOR AND OUTDOOR WALL CRACKS MEGAFLEX®**

**INDOOR AND OUTDOOR CRACKS IN WALLS AND CEILINGS.**

## Features

Megaflex Crack Repair Caulk is a high weather- and UV-ray-resistant sealant, especially designed for treating small joints and cracks. Suitable for indoor and outdoor use.

Megaflex Crack Repair Caulk can be painted over with solvent-free, latex-based or acrylic emulsion paints.

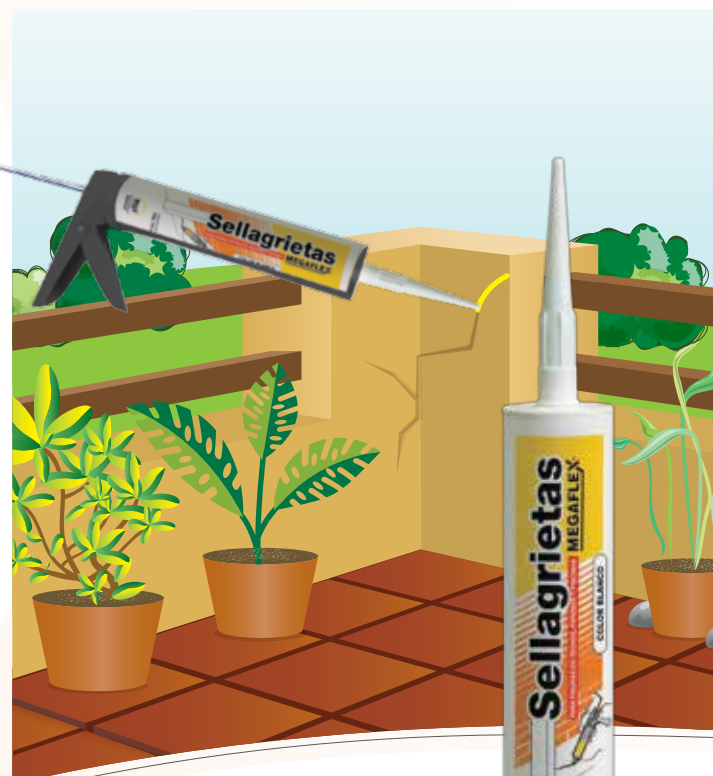
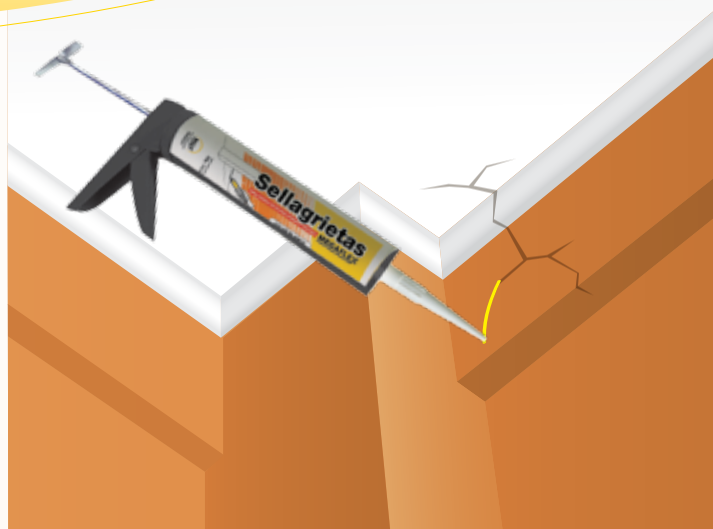
## Uses

Megaflex Crack Repair Caulk is particularly suitable for:

- All sorts of cracks in partition walls, cement walls, masonry, cement mortars, fiber cement, and ceramic floors.
- Joints where the wall or ceiling meets with other materials, such as wood, marble, and glass.

## Advantages

- Maximum adhesion to concrete mortars, masonry surfaces, marble, glass, or wood.
- Optimum resistance to weather and UV rays.
- Can be painted over.
- Easy application.

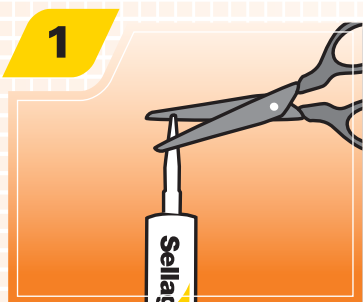
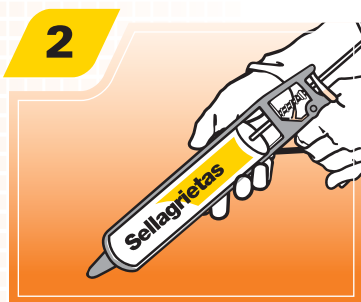
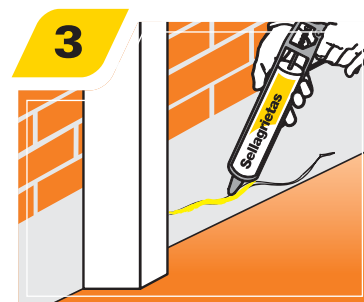


B1852LGX, 1760 Luis M. Drago St., Burzaco, Almirante Brown Industrial District, Buenos Aires (Argentina) / Tel. / Fax: (54-11) 4002-5000 / E-mail: [info@megaflex.com.ar](mailto:info@megaflex.com.ar) / [www.megaflex.com.ar](http://www.megaflex.com.ar) / Technical Department: [tecnico@megaflex.com.ar](mailto:tecnico@megaflex.com.ar)  
**0-800-33-33-649 (MGX)**

# Crack repair caulk

**INDOOR AND OUTDOOR WALL CRACKS** **MEGAFLEX®**
**FOR CRACKS IN ROOFINGS, WALLS AND SWIMMING POOLS**

## APPLICATION


**1**  
 Cut the cartridge nozzle.

**2**  
 Fit into a suitable dispensing gun.

**3**  
 Apply Megaflex Crack Repair Caulk on the surface to be treated.


Make sure the application surface is perfectly dry, clean, and free from dust.

Put the cap securely back in place after use to prevent the product from drying.

## RECOMMENDATIONS

- Suitable for treating cracks and openings up to 5-mm wide.
- Outdoors, apply in good weather conditions so that the drying process (about 4 hours) is not affected by rains.
- If any shrinkage is observed after 24 hours, reapply.
- Do not use in contact with metals.
- Megaflex Crack Repair Caulk can be painted over once it is completely dry (7 days at normal temperature), but only using solvent-free paints.
- Use preferably within 9 months of its manufacture date.

## YIELD

For cracks 5 x 5 mm = 21 m/Kg

## STORAGE

Store indoors, in a fresh, dry, and ventilated room, out of the reach of children and animals, and away from any source of heat.

## COLOR

White.

## HOW SUPPLIED

 550-g/310-ml cartridge with applicator.  
 12-unit display pack boxes

## BASIC COMPOSITION

Acrylic resins.

## FIRST AIDS

Skin contact: Wash with abundant water for at least 15 minutes. Apply moisturizing cream.

Contact with eyes: Wash with abundant water for at least 15 minutes. Contact a healthcare professional.

Inhalation: Seek a fresh ventilated area.

Intake: Do not induce vomit. Contact a healthcare professional.

## FACT SHEET

Non-flammable product

 Density: 1,76 g/cm<sup>3</sup>.

Solids: 88 %.

Skin Formation Time: About 4 hours.

Curing Time: 7 days under ordinary temperature conditions.

Application temperature: 10-40°C (50-104°F).

Hardness Shore A (ASTM D 2240/05): 47.

Tests were performed at 23-25°C (73.4-77°F), with 50% relative humidity.