

Metal caulk

GUTTER AND DUCTWORK STRONG-ADHESION SEALANT **MEGAFLEX®**

GUTTERS, AND METAL, TIN, PLASTIC, OR FIBRE CEMENT ROOFS

Features

Megaflex Metal Caulk is a flexible highly-adhesive caulk for sealing gutters, and metal, plastic, or fiber cement roofs.

Megaflex Metal Caulk provides flexible, waterproof, and long-lasting gluing, repairs and sealings.

Megaflex Metal Caulk can be sanded and painting over once it has dried.

Megaflex Metal Caulk is easily applicable and can be used shortly after application. At normal temperatures, it can be used 24 hours after application.

Once dry, **Megaflex Metal Caulk** provides excellent mechanical resistance.

Uses

Megaflex Metal Caulk is used for sealing, repairing and gluing:

Gutter and metal roof joints, including bolts, nails or other fastening devices

Aluminum and galvanized steel sheets

Air conditioning ducts

Repairs or alterations in automotive assemblies or bodies

General ductwork

Advantages

Maximum adhesion

High mechanical resistance

Maximum flexibility

Fast action

Provides waterproof, flexible, and long-lasting joints

Can be sanded and painted over

Not corrosive



**HIGHLY
ADHESIVE**

**CAN BE USED
SHORTLY AFTER
APPLICATION**

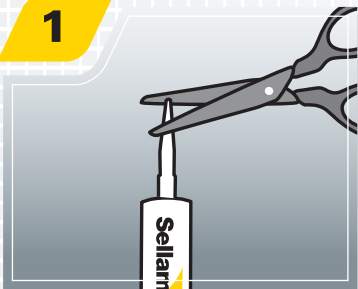
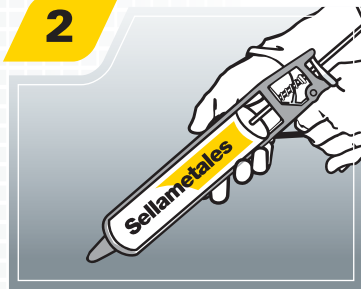
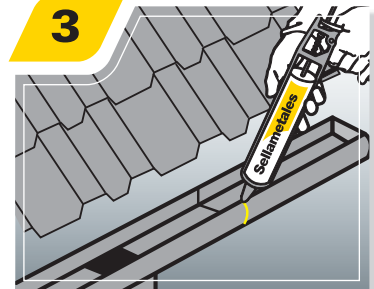


B1852LGX, 1760 Luis M. Drago St., Burzaco, Almirante Brown Industrial District, Buenos Aires (Argentina) / Tel. / Fax: (54-11) 4002-5000 / E-mail: info@megaflex.com.ar / www.megaflex.com.ar / Technical Department: tecnico@megaflex.com.ar

Metal caulk

GUTTER AND DUCTWORK STRONG-ADHESION SEALANT MEGAFLEX®
GUTTERS, AND METAL, TIN, PLASTIC, OR FIBRE CEMENT ROOFS

APPLICATION

1

Cut the cartridge nozzle.
2

Fit into a suitable dispensing gun.
3

Apply Megaflex Metal Caulk on the surface to be treated.


Make sure the application surface is perfectly dry, clean, and free from dust or any other release agent.

Put the cap securely back in place after use to prevent the product from drying.

RECOMMENDATIONS

Apply under good weather conditions so that the surface drying is not affected by rains.

Surface drying starts 10 minutes after application.

Complete drying is achieved 24 hours after application, depending on weather conditions and the product layer thickness.

Use Megaflex Kitchen and Bathroom Caulk preferably within 9 months of its manufacture date.

YIELD

3 lineal meters average per cartridge (considering joints 1m x 1 cm).

STORAGE

Store indoors, in a fresh, dry, and ventilated room, out of the reach of children, and away from any source of heat.

COLOR

Metallic grey

HOW SUPPLIED

300g / 310ml cartridge with applicator
12-units display pack boxes

BASIC COMPOSITION

Synthetic resins.

FIRST AIDS

Skin contact: Remove the product using a clean cloth. Wash with abundant water and soap. Apply moisturizing cream over the affected area.

Contact with eyes: Wash with abundant water for at least 15 minutes. Contact a healthcare professional.

Inhalation: Seek a fresh ventilated area.

Intake: Do not induce vomit. Contact a healthcare professional.

FACT SHEET

Flammable product, do not expose to heat sources or fire.

Density: 0.87 g/cm³.

Skin Formation Time: About 10 minutes.

Complete Curing Time: 24 hours after application, depending on weather conditions and the product layer thickness.

Application temperature Up to 30°C (86°F).

Working temperature -10-50°C (14-122°F).

Elongation at rupture (DIN 53504/94): 607%.

Tensile Strength at Break (DIN 53504/94): 22 Mpa.

Hardness Shore A: 43.

Tear Resistance (ASTM D 816/06): 177.

Tests were performed at 23-25°C (73,4 - 77°F), RH 50%