

# Kitchen and Bathroom Caulk

FOR KITCHEN AND BATHROOM ACCESORIES AND COATINGS **MEGAFLEX®**

**KITCHEN AND BATHROOM ANTI MOULD SEALANT**

## Features

Megaflex Kitchen and Bathroom Caulk is a highly adhesive and resistant sealant which prevents mould and fungi formation. Especially recommended for accessories and for coating surfaces in bathrooms, kitchens and laundries. Megaflex Kitchen and Bathroom Caulk can be painted over with solvent-free, latex-based or acrylic emulsion paints.

## Uses

**Megaflex Kitchen and Bathroom Caulk is particularly suitable for:**

- Bathrooms and kitchens, specifically for sealing sinks, kitchen counters, other accessories, and all areas exposed to the action of water.
- For gluing and sealing materials such as marble, ceramic, tiles, wood, enameled objects, carpentry decorations, and masonry or concrete walls.

## Advantages

- High adhesive power.
- Prevents leaks.
- Prevents the formation of mould.
- Also recommended for outdoor spaces because of its excellent weather and UV-ray resistance.
- Can be painted over.
- Excellent adhesion.



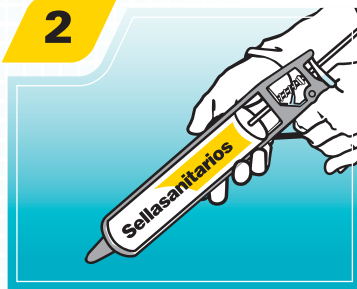
B1852LGX, 1760 Luis M. Drago St., Burzaco, Almirante Brown Industrial District, Buenos Aires (Argentina) / Tel. / Fax: (54-11) 4002-5000 / E-mail: info@megaflex.com.ar / www.megaflex.com.ar / Technical Department: tecnico@megaflex.com.ar

# Kitchen and Bathroom Caulk

 FOR KITCHEN AND BATHROOM ACCESORIES AND COATINGS **MEGAFLEX®**
**KITCHEN AND BATHROOM ANTI MOULD SEALANT**

## APPLICATION

**1**

**Cut the cartridge nozzle.**
**2**

**Fit into a suitable dispensing gun.**
**3**

**Apply Megaflex Bathroom and Kitchen Caulk on the surface to be treated.**


Make sure the application surface is perfectly dry, clean, and free from dust or any other release agent.

Put the cap securely back in place after use to prevent the product from drying.

## Recommendations

- Suitable for treating cracks and openings up to 5-mm wide.
- Outdoors, apply under good weather conditions so that the surface drying process (about 4 hours) is not affected by rains.
- If any shrinkage is observed after 24 hours, reapply.
- Do not use in contact with metals.
- Megaflex Kitchen and Bathroom Caulk can be painted over once it is completely dry (7 days at normal temperature), but only using solvent-free paints.
- Use preferably within 9 months of its manufacture date.

## Yield

For joints 5 x 5 mm = 13 m/cartridge

## Color

White

## Storage

Store indoors, in a fresh, dry, and ventilated room, out of the reach of children and animals, and away from any source of heat.

## How Supplied

 500 g / 310 ml cartridge with applicator  
 12-units display pack boxes

## Basic Composition

Anti mould acrylic resins.

## First Aids

- Skin contact: Wash with abundant water for at least 15 minutes. Apply moisturizing cream.
- Contact with eyes: Wash with abundant water for at least 15 minutes. Contact a healthcare professional. Inhalation: Seek a fresh ventilated area.
- Intake: Do not induce vomit. Contact a healthcare professional.

## Fact Sheet

### Non-flammable product

- Density: 1,54 g/cm<sup>3</sup>
- Skin Formation Time: About 4 hours.
- Curing Time: 7 days under ordinary temperature conditions.
- Application temperature 10-40° C (50-104°F).
- Tensile strength (ASTM D 412/06) 0,8 MPa.
- Elongation at rupture (ASTM C 1135): 70%.
- Hardness Shore A (ASTM D 2240/059): 43).
- Chemical Resistance: Does not resist solvents.

Tests were performed at 23-25°C (73.4-77°F).